
## SERIES RIM8500

### NorthStar<sup>™</sup> brand

### **Bearingless Encoder**

### **Key Features**

- Compact, Bearingless Design Mounts to 180-C Face Motors
- Sensor Modules are Removable On-The-Fly and Require No Gapping
- Stainless Steel and Ductile Cast Iron
   Construction for Harsh Mill Environments
- Magneto-Resistive Technology Resists Dust, Dirt, Oil, Water and Other Common Contaminants

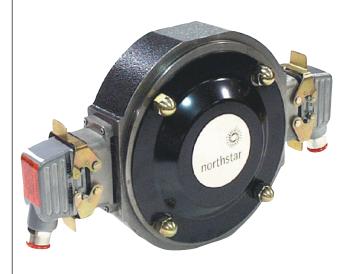

### **SPECIFICATIONS**

#### STANDARD OPERATING CHARACTERISTICS

Code: Incremental

Pulses per Revolution: 60-1200

**Phasing Sense:** A leads B for Counter-Clockwise rotation (CCW) viewing encoder-mounted end

Quadrature Phasing:  $90^{\circ} \pm 22^{\circ}$ 

Symmetry:  $180^{\circ} \pm 54^{\circ}$ 

Index: 270°, ungated (optional gated to

falling B edge)

#### ELECTRICAL

Input Power Requirements: 5-15 Volts DC, 45 mA typical per sensor module plus line driver load

Output Signals: Line Driver, 150mA source/sink Frequency Response: 0 - 120kHz Data & Index Electrical Immunity: 2kV ESD, Reverse Polarity,

**Short Circuit** 

**Connector:** 10 pin industrial duty latching, sealed

NEMA 4 &12, IP65

#### MECHANICAL

Shaft Speed: 7,000 RPM

Mounting Configuration: 8.5" 180C face mount

for NEMA MG1 standards

Housing Material: Cast Iron/Stainless Steel Acceleration Rate: 3600 rpm/sec max Shaft Length Required: 2.5" min Allowable Shaft End-Play:  $\pm\,0.050$ "

Allowable Shaft Runout: 0.003" TIR

#### ENVIRONMENTAL

Operating Temperature Range:

Standard: -40°C to +90°C Extended: -40°C to +100°C

Storage Temperature Range: -40°C to +120°C Humidity: to 98% RH (non-condensing)
Shock (Sensor Module): 1 meter drop test,

30 G's Min

Vibration: 18 G's @ 5-2000 Hz spectrum

#### **ELECTRICAL CONNECTIONS**

Signal	Connector Pin	Pigtail Cable	MS 3102E18-IT#	
Common	1	Black	Α	
В	2	Green	E	
Α	3	Blue	D	
Z*	4	Violet	С	
No Connection	5		_	
Vcc (5-15 VDC)	6	Red	В	
B	7	Yellow	H	
Ā	8	Gray	G	
₹ *	9	Orange		
Shield	10	Braid	J	

<sup>\*</sup> Index (Z) optional. See Ordering Information


## NorthStar<sup>™</sup> brand

# **SERIES RIM8500**

#### **Ordering Information**

To order, complete the model number with code numbers from the table below:

Cod	de 1: Model	Code 2: PF	PR Code 3: Index	Code 4: Wheel Bore	Code 5: Output	Code 6: Electrical	Code 7: Termination		
	R8								
Ordering Information									
Mo Rii Ne 1/2 Fa Mo	Motor Mount Ring, for Nema 8 1/2" C- Face Motors (180C)	0075 0512 Cod 0120 0600 051	Available when Code 2 is 0480, 0512, 0600, 0960 1024 or 1200 G Gated Index (Z, \(\bar{Z}\))	J04 5/8" bore J05 7/8" bore J06 1.00" bore J07 1-1/8" bore K09 1-3/8" bore K10 1-1/2" bore K11 1-5/8" bore K12 1-3/4" bore K13 1-7/8" bore K14 2" bore K15 2-1/4" bore K16 2-1/4" bore K17 2-3/8" bore K18 2-1/2" bore K19 2-7/8" bore Additional Shaft	2 Dual (Isolated)  Differential, bidirectional signals (A, A, B, B)  R 15 Line D	Line Driver (4428) out	C Latching Industrial Connector with 1/2" NPT M 10 pin MS Connector P 18" Pigtail Q Latching industrial connector on 18" cable		
	Up to 3.7: Maximum  End of sl mounting Emerson E01 1.12 E06 2.12 E08 2.37	E06 2.125" E0S E08 2.375" E0S	to 3.75" kimum  I of shaft unting for GE & erson Motors 1.125" EOS 2.125" EOS 2.375" EOS	SSORIES Section For Cor Wheels	nnectors, Spare				

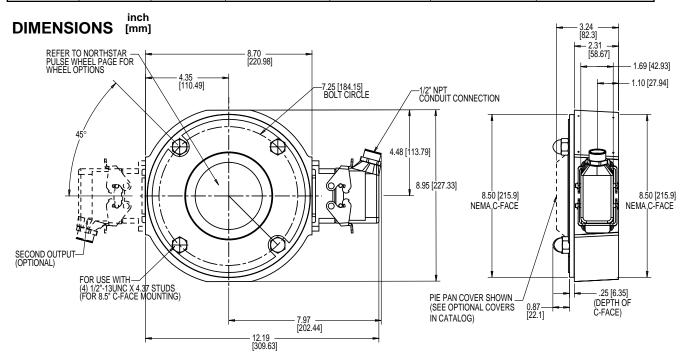



Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA

#### **Customer Service:**

Tel.: +1.800.873.8731 Fax: +1.847.662.4150 custserv@dynapar.com

#### **Technical Support**

Tel.: +1.800.234.8731 Fax: +1.847.662.4150 northstar.techsupport@dynapar.com

#### **European Sales Representitive**

Hengstler GmbH Uhlandstrasse 49, 78554 Aldingen Germany www.henastler.com